


Material ref AR428

Black Commercial Grade Neoprene Rubber Strip with Self Adhesive Backing



A medium hardness solid flexible rubber, economically priced with fair resistance to weathering & some oils for low to medium applications.

Can be used in a range of applications including gasketing & sealing.
Often used in the construction industry to separate dissimilar metals to prevent bimetallic corrosion.
Also for glass clamping & glass bedding.

Thickness range & strip coil lengths

(not all thicknesses available in all products)

1mm, 1.5mm, 2mm, 3mm, 4mm, 5mm, 6mm thick - supplied in strip form 10mtrs long



(10mtr packs – 1 coil x 10mtrs, 50mtr packs – 5 coils x 10mtrs each)

8mm, 10mm, 12mm, 15mm, 20mm, 25mm thick - supplied in strip form 5mtrs long

(10mtr packs – 2 coils x 5mtr each & 50mtr packs – 10 coils x 5mtrs each)

See test data sheets for further specification.

material ref AR428 black solid neoprene & material ref AR990 hot melt double sided adhesive tape.

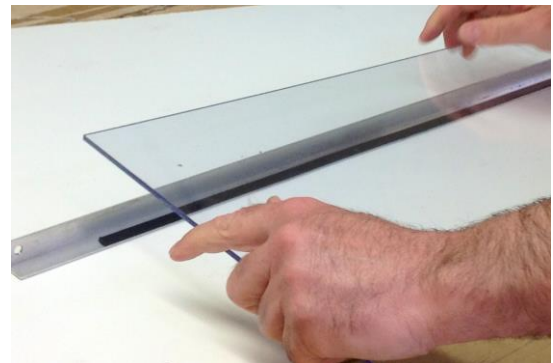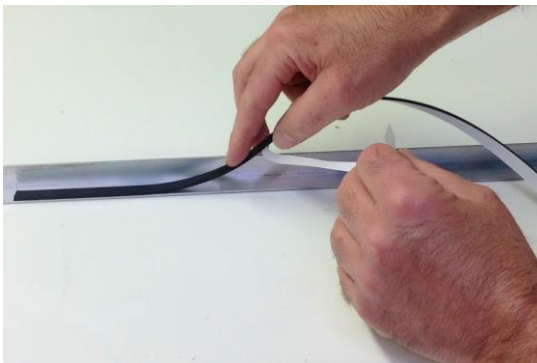

Self Adhesive Backed Solid Neoprene

High tack, hot melt adhesive laminated to one surface, covered with a white silicone release paper for placement purposes & assembly convenience only.

In the case of solid rubbers we do not recommend the adhesives long term performance as a stand alone fixing.

This product is produced to order and therefore has a lead time of up to 5 working days and should be used within a month of purchase due to the adhesives short shelf life when applied to solid rubbers.

As an economical alternative consider purchasing solid neoprene strip plain (no adhesive), plus a 'self apply' tape as a separate item, this is less expensive and has a 1 to 2 day despatch lead time and a long shelf life, see [material ref AR990 'self apply' adhesive tape guide sheet](#).

Delivery

95% of products are despatched within 24hours of receiving order (exception: self adhesive solid neoprene strip, 3 to 5 working days). If orders are required by a specific deadline please email or phone prior placing your order for definite delivery date.

Material samples are available by request and specific questions can be asked via email:

sales@rubberonlinelimited.co.uk

The above is a rough guide and is subject to change without notice.

This information is designed to guide you, the customer, to the most suitable product for your intended application.

The assessment of use is the responsibility of the customer and any liability will remain with the customer.

Terms and conditions apply.

We are committed to customer satisfaction, if you have any concerns about our products or service please contact on us 01268 732185 and ask for customer services.